



IBEX Multi-String Solution

VOLTAGE[®]
IBEX

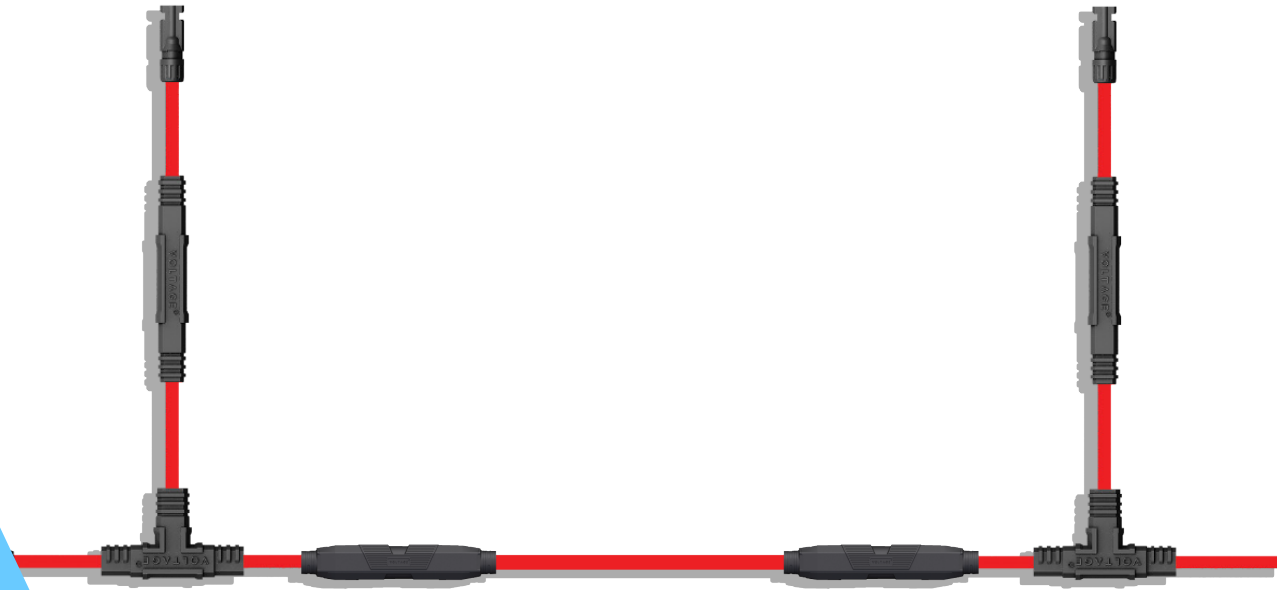

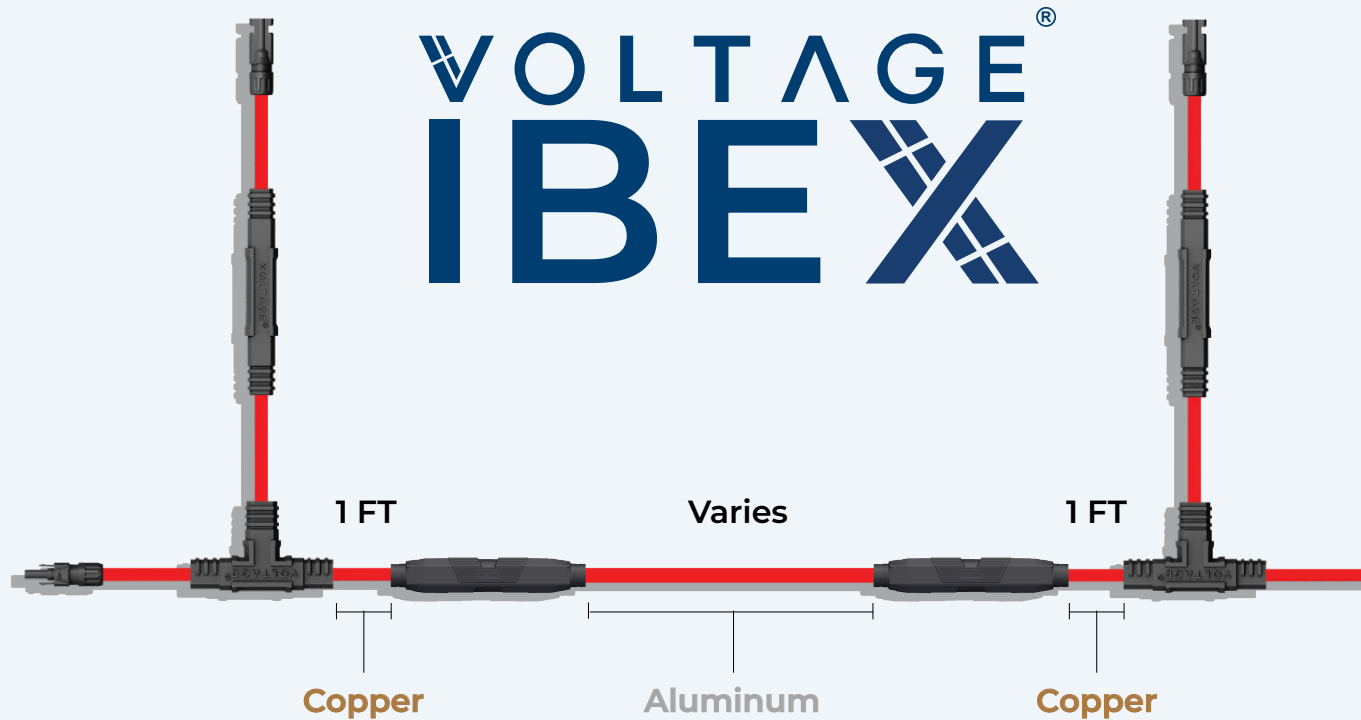

IBEX Multi-String Solution

Key Features

This customizable PV wire harness incorporates our popular aluminum home run extension – ALEX – making any connection variation to a string of modules possible.

An innovative EBOS solution that is a great tool for connecting to combiner boxes, Voltage LYNX or string inverters. IBEX maintains ampacity performance while utilizing more cost-efficient materials.

Technical Data

Voltage Rating	2000V DC
2kV CU Conductor Isc. Range	12AWG (35A) – 6AWG (86A)
2kV AL Conductor Isc. Range	6AWG (70A) – 1AWG (143A)
Operating Temperature	-40°C ~ 90°C
Max Ambient Temperature	50°C
Connectors, Overmolds, In-line Fuses	IP68 Rated (1m/24hrs)
Dustcaps	IP65 Rated (Tested with 12.5 L/min water jet from 2.5-3m distance for 3 minutes)


IBEX Components

Key Features

- Reduces on-site assembly
- Reduces material consumption
- Increases installation efficiency
- Reduces installation cost
- Labeled per customer nomenclature
- Shipped in boxes or on spools
- 100% conductivity tested

Standards

- Certified to UL Std. 9703
- Certified to CAN/CSA Std. C22.2 #182.5 Photovoltaic Connectors
- Certified to CAN/CSA Std. C22.2 #271 Photovoltaic Cables
- Certified to CAN/CSA Std. C22.2 #198.2 Sealed Wire Connector Systems



Technical Data

Voltage Rating	2000V DC
2kV CU Conductor Isc. Range	12AWG (35A) – 6AWG (86A)
2kV AL Conductor Isc. Range	6AWG (70A) – 1AWG (143A)
Operating Temperature	-40°C ~ 90°C
Max Ambient Temperature	50°C
Connectors, Overmolds, In-line Fuses	IP68 Rated (1m/24hrs)
Dustcaps	IP65 Rated (2.5-3mflow12.5(L/min)/3min)

Overmolds



- T/X/Y Kits available
- Outer Mold Flame Rating: V-1 / F1 per UL 746C
- Inner Mold Flame Rating: V-0
- UL: 6703, 1703 & 9703
- Friction welded CU-AL transitional joints used to eliminate increased oxidation caused by the surface contact of dissimilar metals.
- IP68 overmold protects the components from the environment and any occurrences that could damage the transitional joint.
- Joint: 35kV-rated with anti-oxidation and anti-corrosion joint compound.

In-Line Fuses

- Fuse options: 1A–80A
- Fuse brands: Adler, Littelfuse, Hollyland
- 2kV PV copper wire: 12AWG - 6AWG



Conductors

- Wire jacket available in various colors.
- Stranded Copper: 12AWG - 6AWG
- Aluminum: 6AWG - 1AWG

Connectors

- All major connectors available per specific design requirements.



Website



LinkedIn



TEL:
(919) 391-9405



Website:
voltageenergy.com



Email:
sales@voltageenergy.com



Address:
1450 Raleigh Road, Suite 208 Chapel Hill, NC 27517 USA

The Voltage name and associated logos, in addition to other trademarks used herein, are owned exclusively by Voltage, LLC, and are registered with the U.S. Patent and Trademark Office. All rights reserved.